



WAREMA International GmbH
Hans-Wilhelm-Renkhoﬀ-Str. 2
97828 Marktheidenfeld • Germany
Fax: +49 9391 20-3899
www.warema.com • orders@warema.com

The General Terms and Conditions of the WAREMA company responsible for you apply. The [General Terms and Conditions](#) can be viewed on the Internet and downloaded from there. The order is based on these General Terms and Conditions in the contract.

Our products are custom-made items and therefore cannot be exchanged or returned.



Attention!

Repeat
(E-mail/fax)



					Different delivery address, contact and telephone	Project order number
Customer no.	Order date	Orderer	Delivery date	Offer number		

Customer name: _____

Reference: _____

Page 1 / 3

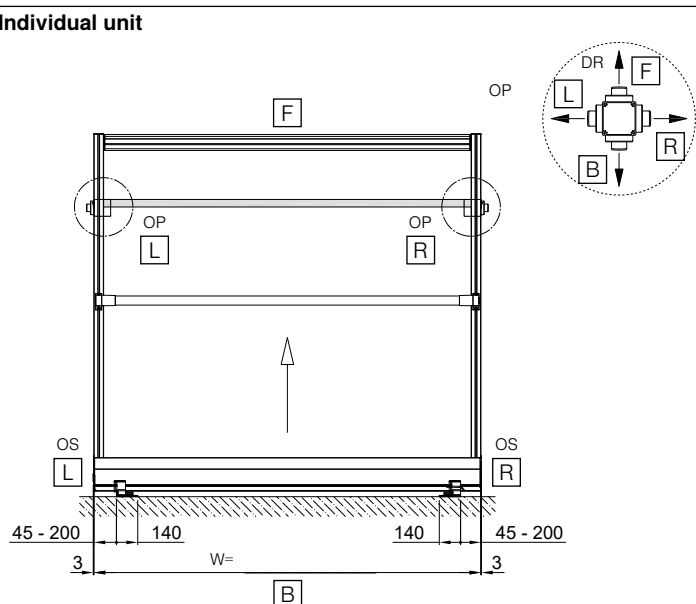
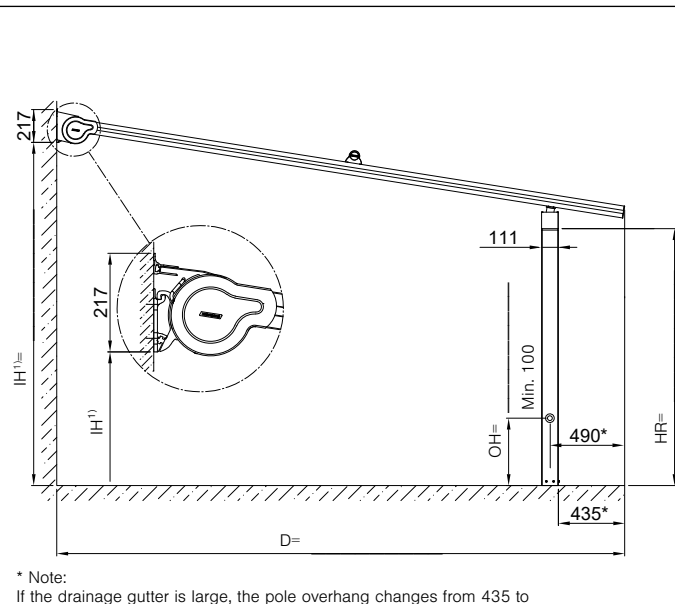
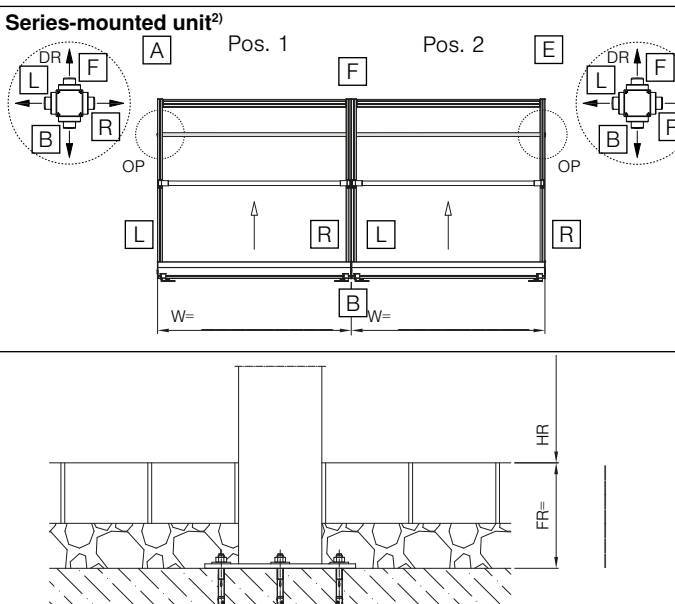
Notes	
-------	--

Order form for pergola awnings Perea P60

The current technical data apply.

Order data: view from inside to outside. All dimensions are order dimensions in mm. The standard model will be used wherever details are not filled in.





Note: In case of an on-site gradient, please provide a sketch. Mechanically coupled units are not possible.

Individual unit 		Series-mounted unit²⁾ 			
Legend	Legend	Legend	Legend	Legend	Legend
W	Order width	OP	Outlet position	A	Beginning
D	Order depth	DR	Drainage, outlet direction	E	End
IH	Installation height	L	Left		
HR	Headroom	R	Right		
FR	Floor recess	F	Front		
OH	Outlet height	B	Rear		
OS	Operation side				

More information/drawings can be found on the following pages.

¹⁾ Determination of the installation height differs with ceiling console.

²⁾ Pergola awnings are mounted in series,
- without spacing, incl. seal
- an expansion joint of 20 mm is needed for widths of 12000 mm and greater

Drive <input type="checkbox"/> Motor (standard) <input type="checkbox"/> WMS Radio motor <input type="checkbox"/> EWFS Plug receiver <div style="float: right;"> <input type="checkbox"/> Hand-held transmitter basic/1-channel <input type="checkbox"/> WMS Hand-held transmitter plus (6-ch.) <input type="checkbox"/> HHT multi-ch/8-ch </div>	Pole fixing <input type="checkbox"/> Ground screw piece(s), Krinner ground screw — piece(s), adapter plates incl. fixing material  <input type="checkbox"/> Concrete foundation <input type="checkbox"/> Pole for concrete foundation (standard) <input type="checkbox"/> Pole for concrete foundation (optional)  	Colour specifications Frame colour Colour number _____ Surface ⁴⁾ _____ Fabric Design _____
Console type/substructure <div style="display: flex; justify-content: space-between;"> <div> <input type="checkbox"/> Wall <input type="checkbox"/> Ceiling <input type="checkbox"/> Rafters — Rafter thickness <input type="checkbox"/> Fixing material³⁾ </div> <div> <input type="checkbox"/> Concrete <input type="checkbox"/> Solid brick <input type="checkbox"/> Hollow brick <input type="checkbox"/> Aerated concrete <input type="checkbox"/> Wood </div> </div>	<input type="checkbox"/> Base cover (optional) 	Accessories Light <input type="checkbox"/> Integrated LED strips <input type="checkbox"/> WMS Dimmer (LED) <input type="checkbox"/> EWFS Plug receiver lighting — piece(s) LED strip light rail Width _____ Colour number _____ Surface ⁴⁾ _____ <input type="checkbox"/> WMS Dimmer (LED) <input type="checkbox"/> EWFS Plug receiver lighting
Side cover (cover panel) <input type="checkbox"/> Recess installation		
Notes 1		
	Fixing material <input type="checkbox"/> FAZ (without spacing) <input type="checkbox"/> Threaded rods (with spacing) <input type="checkbox"/> None Multicube set <input type="checkbox"/> Grey <input type="checkbox"/> Anthracite <input type="checkbox"/> Dark brown	Radiant heater — piece(s) Basic radiant heater — Colour (satin finish surface): <input type="checkbox"/> RAL 9016 <input type="checkbox"/> RAL 9006 <input type="checkbox"/> RAL 9005 <input type="checkbox"/> WMS Plug receiver power <input type="checkbox"/> EWFS Radiant heater control — piece(s) Design radiant heater — Colour number _____ — Surface ⁴⁾ _____ <input type="checkbox"/> WMS Plug receiver power
	Drainage gutter	
	<input type="checkbox"/> Drainage gutter, small <input type="checkbox"/> Drainage gutter, large (with facility for front-mounted awning with easyZIP guidance)	<i>Accessories continued on next page</i>
	Pole overhang: 435/490 mm 470/525 mm	<small> ³⁾ Standard fixing materials for selected substructure without spacing to the load-bearing substructure. ⁴⁾ If no information is provided about the surface, the standard defined as per the WAREMA Colour World will be supplied. </small>

Accessories <i>continued</i>	Drive	Accessories <i>continued</i>
Front-mounted awnings with easyZIP guidance FRONT - As viewed in the extension direction - Attached between the poles - Large drainage gutter necessary Only one line is routed through the main unit for the front-mounted awning with easyZIP guidance, front. The line is routed on the connection side of Perea P60. For series-mounted units, the line is routed to the front on the outside through the guide rail. By entering the data for the Perea P60, the following features for front-mounted awnings with easyZIP guidance, front, are predefined and specified in the standard: - Individual unit - Order width = pole distance - Order height = Headroom - 5 mm (for internal installation) = Headroom - 11 mm (for base plate) = Headroom - 30 mm (for base cover) - Size 15 cover panel - Deep guide rail, 26 x 110 mm - Operation side = operation side P60 (for series-mounted unit P60 outside) - Cable exit = top (free cable end, 1.2 m long, without STAS) - Left rolling blind - Reveal installation - Installation on aluminium - Incl. fixing material	<input type="checkbox"/> Motor <input type="checkbox"/> WMS Radio motor ⁵⁾ <input type="checkbox"/> EWFS Radio motor _____ piece(s) Hand-held trans. basic/1-ch _____ piece(s) WMS Hand-held transmitter plus (6-ch) _____ piece(s) Hand-held trans. comfort/8-ch Awning (please note the processing notes in the technical data) Design _____ Outside ⁶⁾ _____ Fabric connection (selectable for all acrylic qualities) <input type="checkbox"/> Sew (standard) <input type="checkbox"/> UltraSeam™ Colour specifications Colour number _____ Surface ⁴⁾ _____ Special colour/anodisation _____ Drop profile <input type="checkbox"/> With brush seal	Front-mounted awnings with easyZIP guidance, LEFT and RIGHT We recommend ordering front-mounted awnings with easyZIP guidance on the left and right sides only after the main unit has been installed. Measurement inaccuracies can result in front-mounted awnings that do not fit. The operation side is on the house wall side in each case. We recommend a right-rolling blind with a size 15 cover panel. When attaching front-mounted awnings with easyZIP guidance on the left and right sides, the cable exit is on the facade.
Notes 2		